

## ADDENDUM No. 1

---

**TO:** ALL BIDDERS  
**PROJECT:** Mt Haggin WMA Tenmile Creek Boundary Fence  
FWP #7095307  
**DATE:** August 2, 2012  
**FROM:** Dan Stinson, Project Manager

**== !NOTE! THIS ADDENDUM INCLUDES A REVISED PROPOSAL FORM! ==**

**Acknowledge receipt of this addendum by inserting its number and date in the Proposal Form and on the Bid Envelope. Failure to do so may subject bidder to disqualification.**

This Addendum forms a part of the Contract Documents. Clarification and/or modifications area as follows:

**1) Change** - Replace original Proposal Form found on page 12 and 13 of the Project book is to be replaced in it's entirety by the Revised Proposal form at the end of this Addendum.

**2) Add** – New item 10.

**New Item 10** is a unit cost for single panel braces to be added to existing cross fences at terminations with new fence. This is to be provided and installed in existing cross-fence adjacent to new boundary fence as shown in Addendum drawing following.

**3) Add** – New item 11.

**New Item 11** is a unit cost for single wood line post to be added to wire fences as directed by Project Manager. This is in addition to the "1 every10" line posts already called for in Technical Specifications (page 120), in Section 02810 - Fencing, Section 3.2 FENCE INSTALLATION, Item G.

**4) Replace Section** - In **Technical Specifications** (page 121), in **Section 02810 - Fencing**, PART 3 - EXECUTION, Section 3.2 FENCE INSTALLATION, Item Q shall be replaced with the following:

Q. All cross-fences, shall **not** be fastened to the new fence but shall be terminated, in a workmanlike manner, adjacent thereto with a separate brace, as shown in the "INTERSECTING FENCES DETAIL" on the following Addendum Drawing page.

**5) Addition - Technical Specifications** (page 111), in **Section 02810 Fencing**, Page 9 of 10, Part 3 EXECUTION, Section 3.2 FENCE INSTALLATION, paragraph N is supplemented and clarified by the drawing "TYPICAL BRACE PANEL" on the following Addendum Drawing page.

**6) Replace Section - In Technical Specifications** (page 125), in **Section 02841 - Rail Jackleg Fence**, Part 2, Section 2.1 Materials, Items A and B shall be replaced with the following:


- A. Wood jack legs shall be 5-inch minimum diameter, minimum 52" long, peeled, and **full length pressure treated** per AWP standards. Posts shall be machined, cut, and notched for universal matching. **Treating shall be done after machining.**
- B. Wood rails for jackleg fence shall be peeled with a 4 inch minimum diameter and 5 inch maximum butt and shall be 12 feet long. **Rails shall be full length pressure treated** per AWP standards. **Treating shall be done after any necessary machining.**

**END OF ADDENDUM NO. 1**

# INTERSECTING FENCES DETAIL


7" Wood Posts (typ.)  
(Not to Scale)

Existing intersecting fences shall be ended with a single brace.  
Single brace shall be 6" - 8" away from new fence.  
Maintain existing wire spacing on intersecting fences.

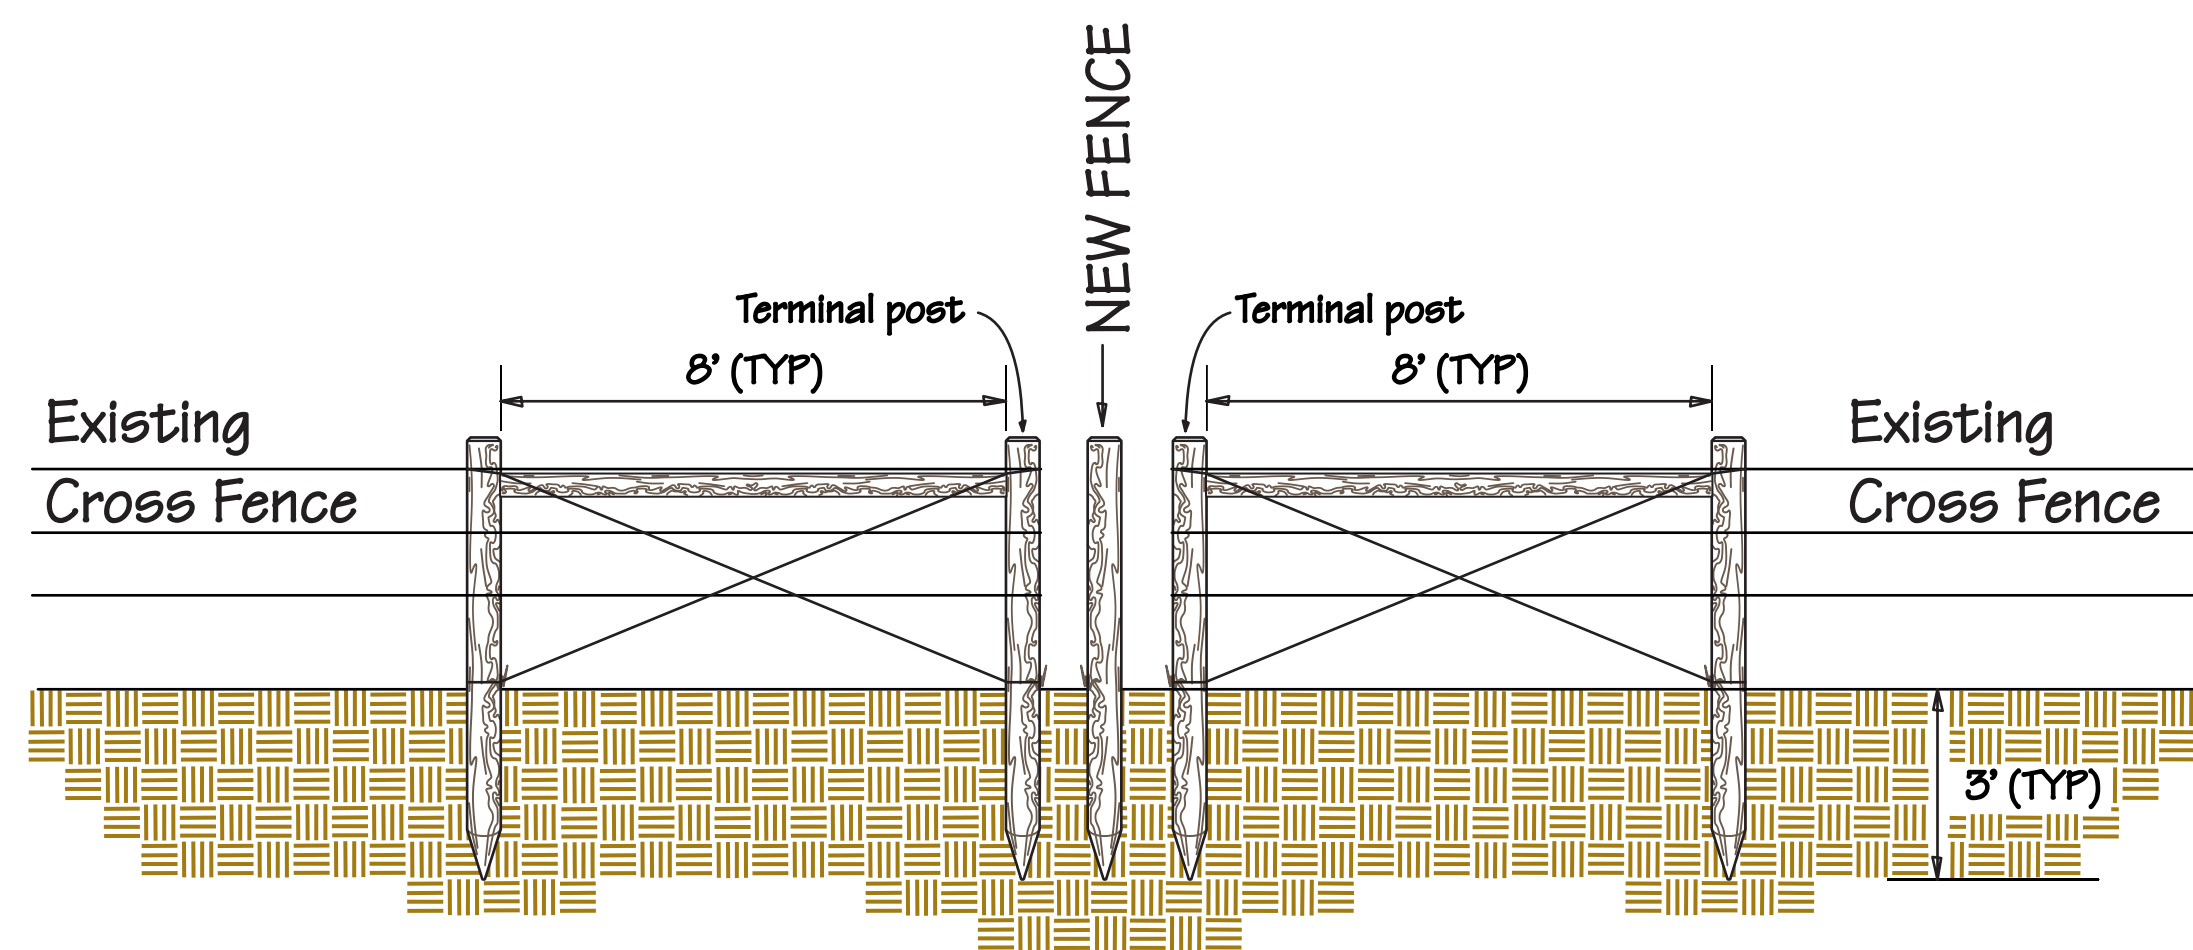

TERMINATION of CROSS FENCES at NEW FENCE

7" Wood Posts (typ.) - (Not to Scale)

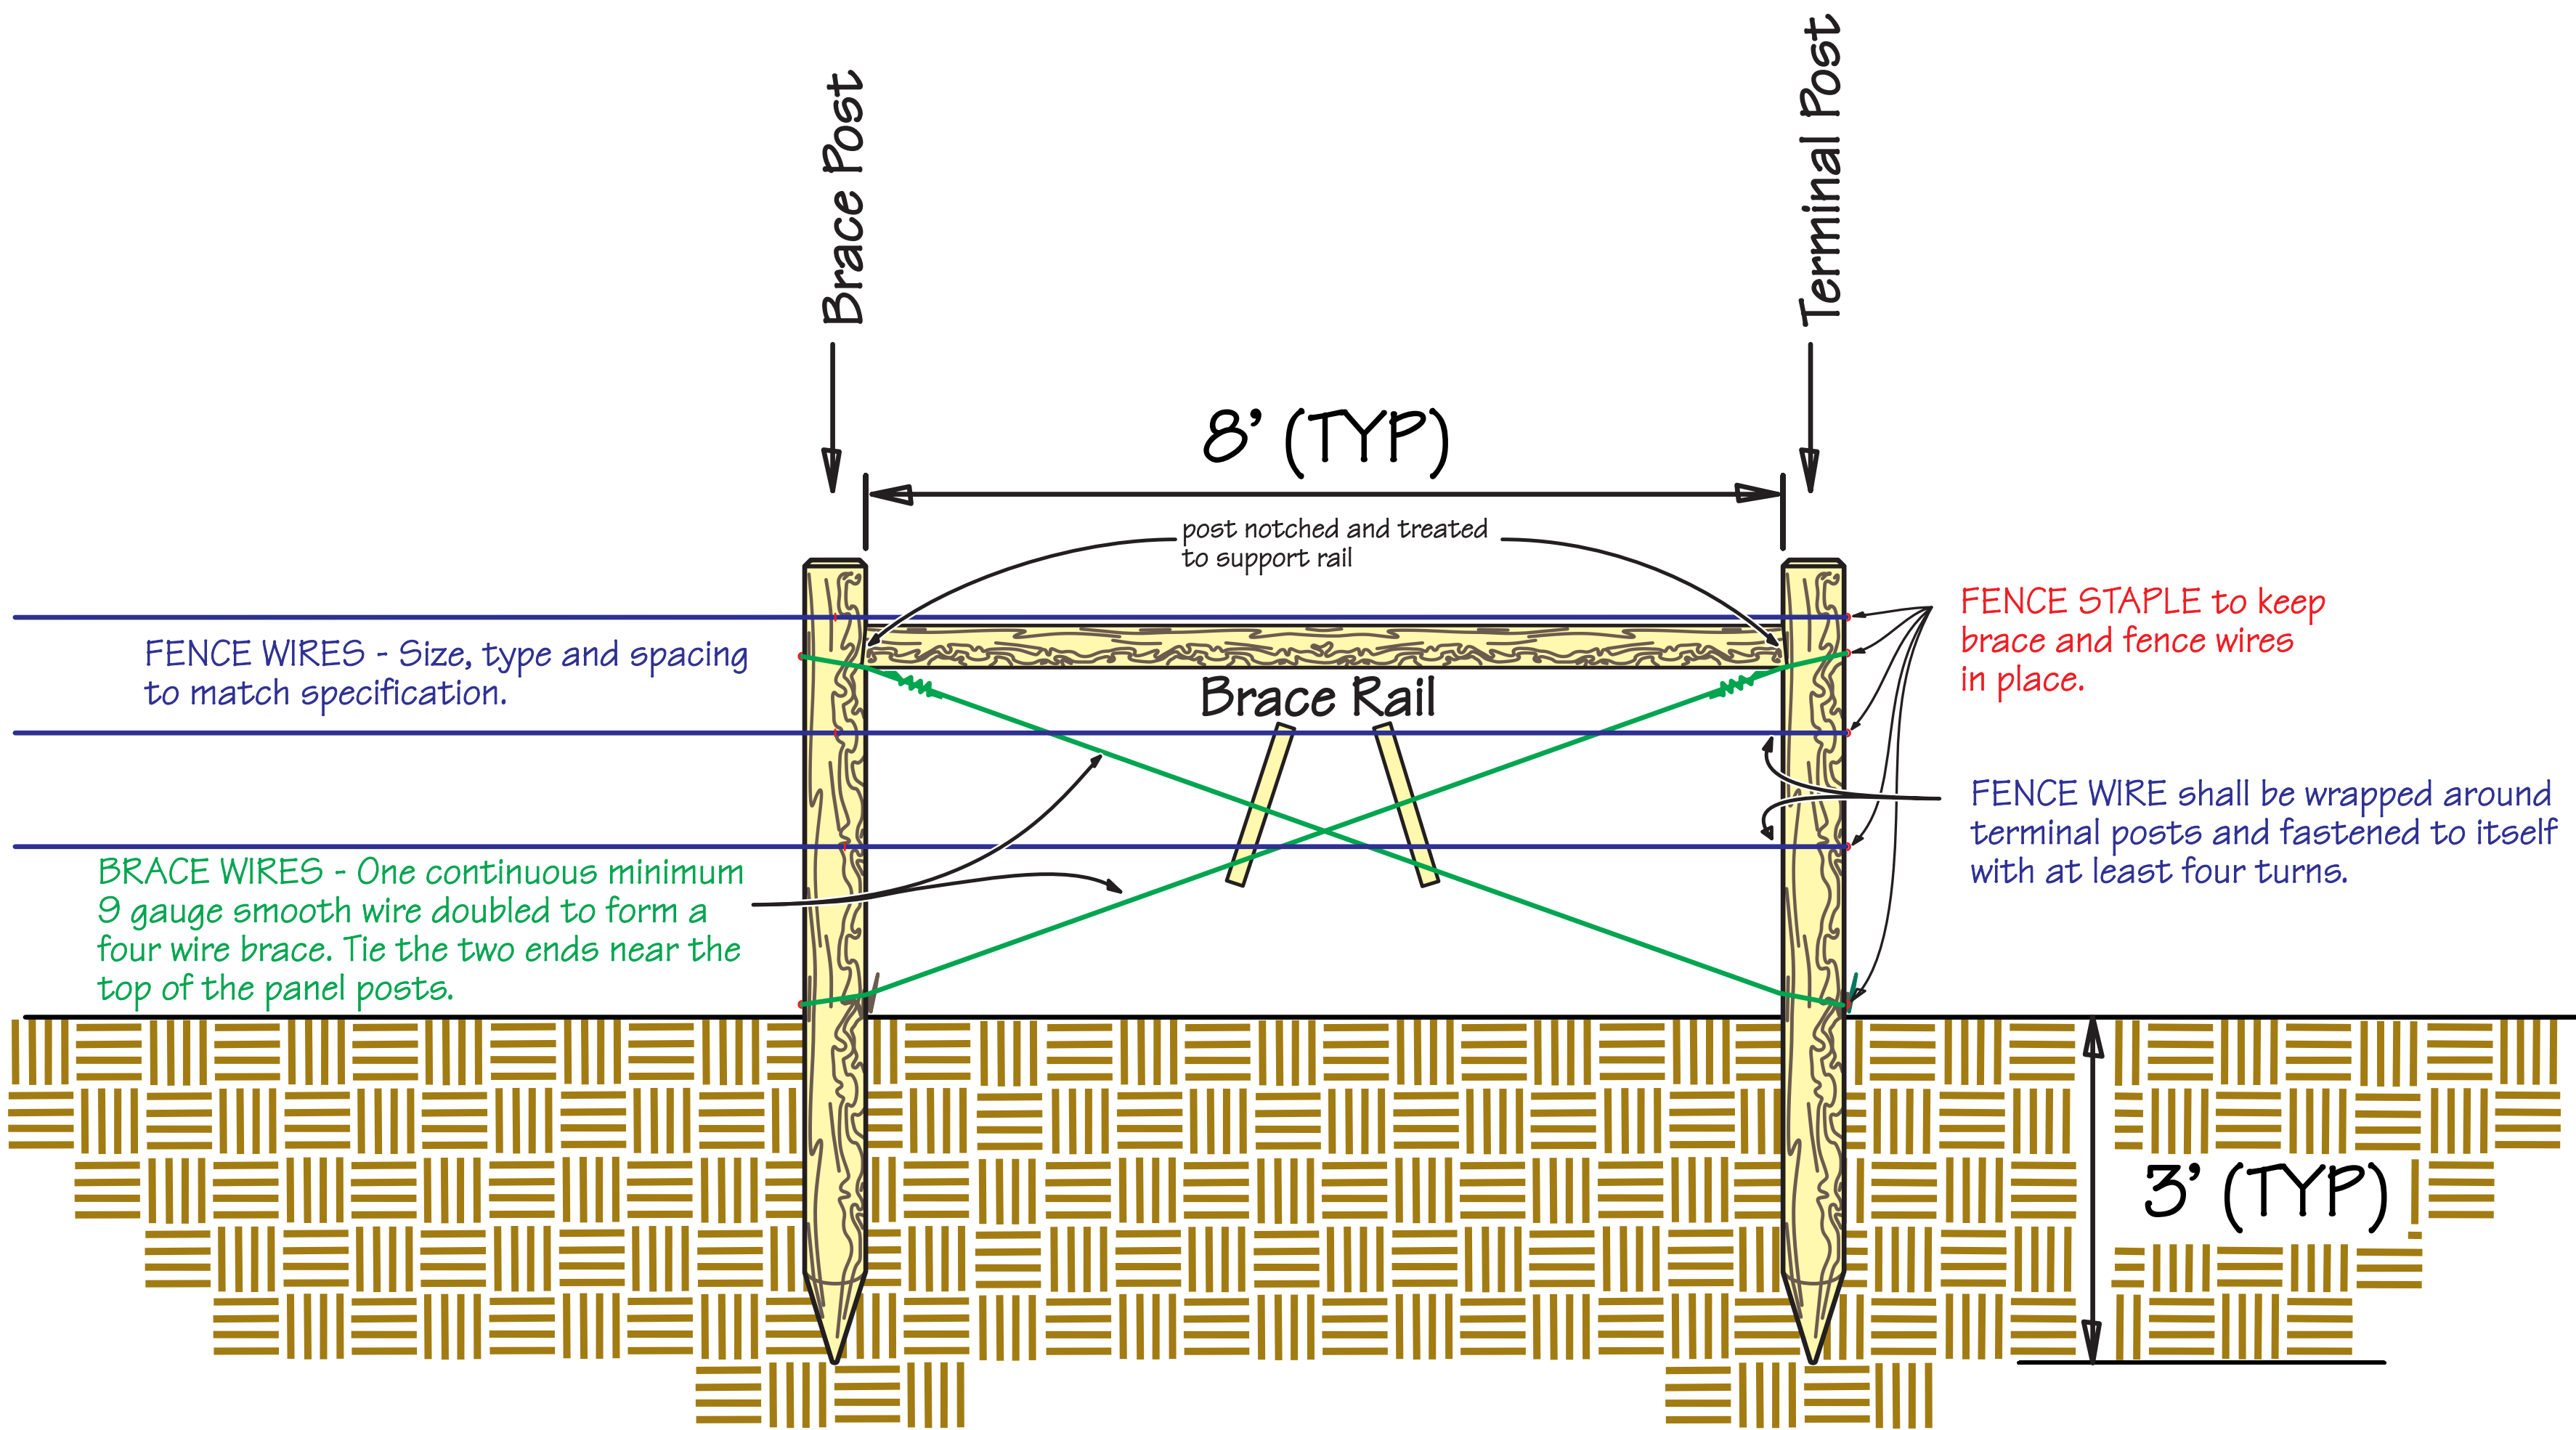

## TYPICAL BRACE PANEL

showing fence wires from one direction for clarity

7" Wood Posts (typ.) - (Not to Scale)

- Double Braces (three posts) have two adjacent Brace Posts and the Terminal Post on the end.
- Corner braces typically share a common Terminal Brace.

D. Stinson August, 2012

Drawn by: Date:

Revised by: Date:

Approved by: Date:

Checked by: Date:

Approved by: Date:

Approved by: Date:



**Montana Fish,  
Wildlife & Parks**

**Tenmile Pasture Boundary Fence**

**Mt Haggin WMA - Addendum No. 1 - FWP# 7095307**

## PROPOSAL

= Revised August 1, 2012 =

Montana Fish, Wildlife & Parks  
Design and Construction Section  
PO Box 200701, 600 North Park Avenue  
Helena, Montana 59620-0701

FWP Project #: 7095307

The undersigned, having familiarized himself with the conditions of the work and the contract documents as prepared by FWP, agrees to furnish all labor, materials, equipment, and services necessary to complete all general construction work, as bid herein, for a project entitled **Tenmile Boundary Fencing, Mount Haggin Wildlife Management Area, Deer Lodge County, Montana** in accordance with the Contract Documents including all Addenda. Bidder agrees to perform all work described below at the price shown as follows:

### Base Bid

Item #	Description	Estimated Quantity	Unit Measure	Unit Price	Amount
1	Mobilization / Demobilization	1	LS	\$	\$
2	Three wire fence with steel posts and wood braces as per specifications. <b>Wire and steel posts provided by owner.</b>	7900	LNFT	\$	\$
3	Three wire fence with steel posts and wood braces as per specifications. <b>Wire and steel posts provided by contractor.</b>	12700	LNFT	\$	\$
4	Three rail jackleg fence	1450	LNFT	\$	\$
5	Three wire gate	6	Each	\$	\$
6	Three wire stream crossing	1	Each	\$	\$
7	Jackleg fence removal	16200	LNFT	\$	\$
8	Wire fence removal	3900	LNFT	\$	\$
9	New heavy duty steel wings for existing cattleguard.	1	LS	\$	\$
10	Single panel brace in cross fences	4	Each	\$	\$
11	Single additional wood line post	10	Each	\$	\$
				<b>TOTAL</b>	<b>\$</b>

### BASE BID

\_\_\_\_\_ **AND** \_\_\_\_\_ **/100 DOLLARS ( \$ )**

Contractor certifies that he is a duly and regularly licensed contractor registered with the Montana Department of Labor and Industry:

BY: \_\_\_\_\_

TELEPHONE #: \_\_\_\_\_ FAX #: \_\_\_\_\_

REGISTRATION # : \_\_\_\_\_

BUSINESS ADDRESS: \_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

E-mail Address: \_\_\_\_\_

This bidder acknowledges receipt of the following addenda:

ADDENDUM NO. 1 DATED \_\_\_\_\_

ADDENDUM NO. \_\_\_\_\_ DATED \_\_\_\_\_

ADDENDUM NO. \_\_\_\_\_ DATED \_\_\_\_\_